


# Pyrocrete<sup>®</sup> 241

Proven Protection Under Fire

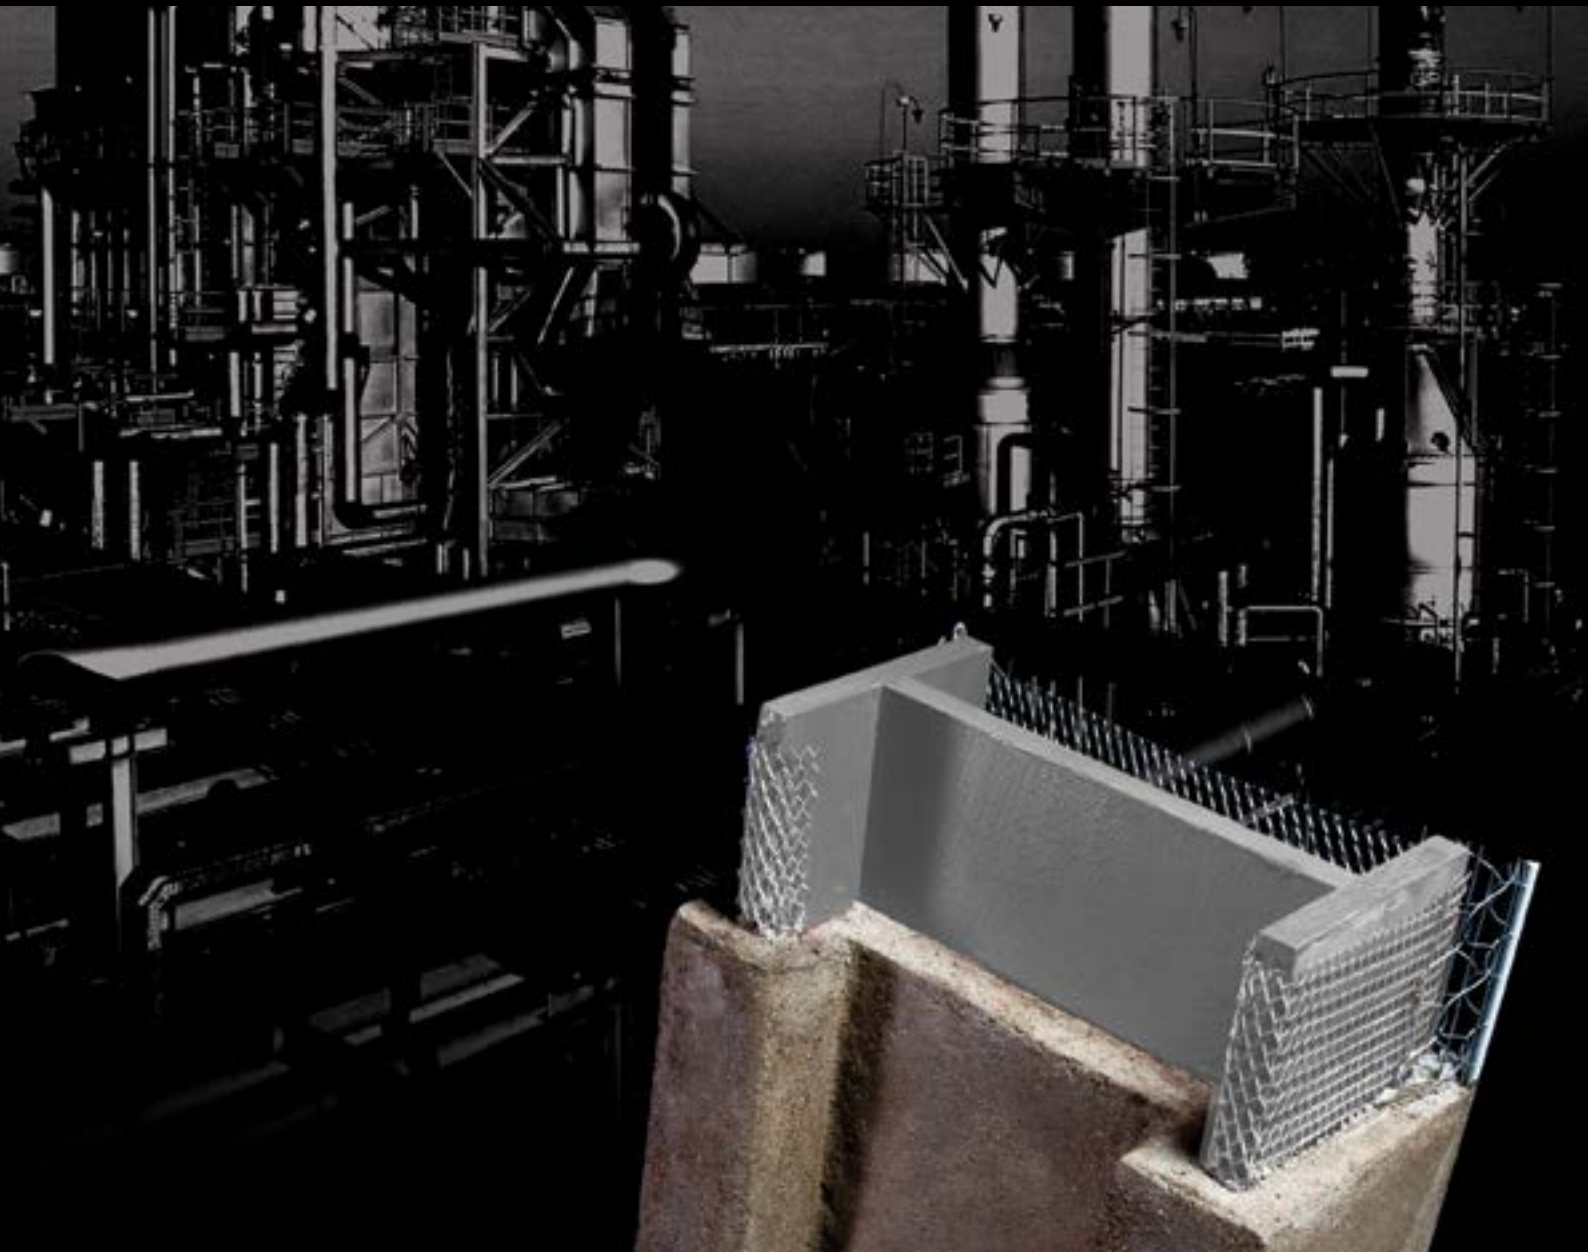

# History of Performance Excellence

**Over 30 years of successful case histories and more than 100 million square metres of structural steel protected worldwide.**

Since the late 1970's Pyrocrete 241 has been the industry leader in cementitious fireproofing and continues to be the most specified and highly regarded cementitious fireproofing material in the world. With over 30 years of unparalleled performance, it is the global benchmark for high performance cementitious fireproofing in the refining and petrochemical industries.

Pyrocrete 241 is synonymous with high quality. Pyrocrete 241 is manufactured using only the highest quality raw materials with strict QA/QC protocols all under the UL follow up service to ensure the highest quality product for our customers worldwide.

## Pyrocrete 241 Performance Advantages

Pyrocrete 241 is a high density, exterior grade, heavy duty, cementitious fireproofing material ideal for use in industrial and petrochemical environments. Pyrocrete 241 can provide 1 to 4 hour(s) of fire protection for structural steel, vessel skirts, bulkheads, LPG vessels, LNG terminals or to upgrade the fire resistance of existing concrete.

Pyrocrete 241 is suitable for both field and shop applications when applied by our published application procedures.

The superior physical properties of Pyrocrete 241 promote high durability when handling, during construction, and while in service.

## Applications

- > Refineries
- > Chemical Plants
- > Gas Plants
- > LPG Vessels
- > LNG Facilities
- > Pharmaceutical Facilities
- > Pulp and Paper Mills
- > Nuclear Power Plants
- > Conventional Power Plants
- > Biomedical Facilities
- > Factories and Warehouses
- > Commercial Buildings

## Features and Benefits

PRODUCT FEATURE	PERFORMANCE BENEFIT
55 PCF Density (avg.)	Harder, more durable material. Tough surface suitable for harsh exterior exposures.
High Impact & Compressive Strength	Damage resistant during transportation, construction, and throughout service life.
High Bond Strength	Prevents failures from disbondment and cracking which lowers repair & maintenance costs.
Industry Leading Ratings	Lower installation & material costs.
1/5 The Weight of Concrete	Weight savings, reducing overall construction, transportation & installation costs.

PIPERACK SUPPORT PROTECTED WITH PYROCRETE 241, WITHSTANDS HYDROCARBON FIRE.



PYROCRETE 241 APPLIED OFFSITE AND TRANSPORTED TO JOBSITE.




# Rigorously Tested, Certified & Proven

**Pyrocrete 241 has a proven track record of performance when subjected to the harshest environmental conditions and the extreme heat of hydrocarbon fire.**

Pyrocrete 241 has been tested and certified for a variety of exposures, with successful performance in actual hydrocarbon fires in refining and petrochemical facilities around the world.

## Certifications & Listings:

- > UL (Underwriter's Laboratories) 
  - UL 1709 Hydrocarbon Ratings
  - UL 263 (ASTM E-119) Cellulosic Ratings
- > Lloyd's Register of Shipping
  - ISO 22899-1 Jet Fire Ratings
- > BS-476 Hydrocarbon Ratings
  - HP/A: 30-305
- > FM Global (Factory Mutual)
  - LPG Vessel Approvals
  - Structural Steel Approvals

## UL Environmental Testing:

Pyrocrete 241 has successfully passed the following exposures simulating 20+ year exterior life cycle:

- > Accelerated Aging
- > High Humidity
- > Industrial Atmosphere
- > Salt spray
- > Combination Wet / Freeze / Dry Cycling


## Performance Testing

Pyrocrete 241 has successfully passed the following independent third party test programs:


- > Jet Fire Impingement
- > Hose Stream Endurance
- > Cryogenic Exposure
- > 3 Bar Overblast

PHYSICAL PROPERTIES	TEST PROCEDURE	TYPICAL RESULTS
Density	ASTM E605	55 PCF (.88 g/cm <sup>3</sup> )
Bond Strength	ASTM E736	4,871 psf (233 kPa)
Compressive Strength	ASTM E761	817 psi (5,633 kPa)
Impact Resistance	ASTM E760	Pass
Deflection	ASTM E759	Pass
Corrosion	ASTM E937	0.00 g/mm
Flame Spread	ASTM E84	0
Smoke Development	ASTM E84	0
Average Flexural Strength	ASTM D790	502 psi (3,461 kPa)
Insulation "K" Factor @ 24°C	ASTM C177	0.87 BTU in/hr ft <sup>2</sup> °F (0.125 W/m <sup>2</sup> K)
Coverage per 22.7 kg bag	-	1.3 m <sup>2</sup>

Pyrocrete 241 Contour Design



Pyrocrete 241 Box Design



JET FIRE IMPINGEMENT



CRYOGENIC EXPOSURE



# GLOBAL COATINGS LEADERS™

RIGHT PEOPLE · RIGHT PRODUCTS · RIGHT LOCATIONS



## GLOBAL MANUFACTURING PLANTS

**CARBOLINE COMPANY**  
GLOBAL HEADQUARTERS  
2150 SCHUETZ ROAD  
ST. LOUIS, MO 63146 USA  
PH: +1-314-644-1000  
WWW.CARBOLINE.COM

**ARGENTINA - BUENOS AIRES**  
EINSTEIN 1095  
PARQUE INDUSTRIAL OKS  
GARÍN PROV. DE BUENOS AIRES, ARGENTINA  
PHONE: 54-3327-44-2222  
FAX: 54-3327-44-2223

**AUSTRALIA - BRISBANE**  
7 PRODUCTION AVE  
ERNEST JUNCTION  
QUEENSLAND 4214  
AUSTRALIA  
PHONE: +61 7 3287 0222  
FAX: +61 7 5594 9093

**BRAZIL - JARDIM CAMPO GRANDE**  
CNPJ: 58.681.867/0001-30  
RODOVIA VITO ARDITO, 6401  
KM 118.5, JARDIM CAMPO GRANDE  
12282-535 CACAPAVA SP  
BRAZIL

**ITALY - ALGHERO**  
VIA MILANO 150  
20093 COLOGNO MONZESE (MI), ITALY  
PHONE: 3902-25 3751  
FAX: 3902-25 37560

**CANADA - ONTARIO**  
420 TAPSCOTT ROAD UNIT 5  
SCARBOROUGH, ONTARIO  
M1B 1Y4, CANADA  
PHONE: 416-292-2361  
FAX: 416-298-5887

**CHINA - DALIAN**  
HOU SHI CUN, DA WEI JIA ZHEN  
JIN ZHOU DISTRICT  
DALIAN, CHINA 116110  
PHONE: 86-411-8789-8441, 8442, 8443, 8444  
FAX: 86-411-8789-8445

**INDIA - CHENNAI**  
NO. 356 & 357 SIDCO  
INDUSTRIAL ESTATE  
AMBATTUR,  
CHENNAI 600 098  
INDIA  
PHONE: 91-22-28500321  
FAX: 91-22-28500323

**INDIA - MAHARASHTRA**  
GUT NO. 300  
VILLAGE MUSSARNE  
BHIWANDI WADA ROAD,  
TALUKA WADA,  
DISTRICT PALGHAR,  
MAHARASHTRA  
INDIA

**ITALY - ALGHERO**  
VIA MILANO 150  
20093 COLOGNO MONZESE (MI), ITALY  
PHONE: 3902-25 3751  
FAX: 3902-25 37560

**JAPAN - AMAGASAKI**  
TERAMOTO UNYU SOKO CO.,  
LTD 17  
MINAMIHATSUSHIMA-CHO,  
AMAGASAKI, 660-0833  
JAPAN  
PHONE: 81-3-3643-4501  
FAX: 81-3-3643-2951

**MALAYSIA - KUALA LUMPUR**  
LOT 37631-37632 JALAN  
6/37A  
TAMAN BUKIT MALURI  
INDUSTRIAL AREA  
KEPONG 52100,  
KUALA LUMPUR, MALAYSIA  
PHONE: 603-6277-9575  
FAX: 603-6277-4645

**NEW ZEALAND - TAURANGA**  
91-111 OROPI ROAD  
GREERTON  
TAURANGA  
NEW ZEALAND  
PHONE: +64 7 5411 221  
FAX: +64 7 541 1310

**NORWAY - LIERSTRANDA**  
P.O. BOX 593  
3412 LIERSTRANDA,  
NORWAY  
PHONE: 47-32-857300  
FAX: 47-32-857301

**PUERTO RICO - SAN LORENZO**  
URB. APONTE #5  
SAN LORENZO, PUERTO RICO 00754  
PHONE: 787-736-4221  
FAX: 787-736-53133

**SAUDI ARABIA - DAMMAM**  
1ST INDUSTRY CITY, 28TH STREET  
P.O. BOX 1050  
DAMMAM 31431,  
KINGDOM OF SAUDI ARABIA  
PHONE: +966 3 847 3044  
FAX: +966 3 847 3689

**SPAIN - VALLIRANA**  
PERLITA Y VERMICULITA SL  
VAT NO. ESB58598418  
POLIGONO INDUSTRIAL CAN PRUNERA S/N  
VALLIRANA 08759  
SPAIN

**SOUTH AFRICA - JOHANNESBURG**  
8 CRESSET ROAD  
MIDRAND INDUSTRIAL PARK  
JOHANNESBURG,  
SOUTH AFRICA  
PHONE: 27-11-2545500  
FAX: 27-11-310-2872

**SOUTH KOREA - BUSAN**  
43-1, JINYOUNG-RI  
JINYOUNG-EUB  
KIMHAE-CITY, 621-800  
KYOUNGSANGNAMDO,  
KOREA  
PHONE: 82-55-343-6441/5  
FAX: 82-55-343-6414

**TURKEY - BURSA**  
ALI OSMAN SONMES CAD.  
NO:4  
BURSA, DOSAB 16369  
TURKEY  
PHONE: 90-224-261-0537

**UAE - DUBAI**  
P.O. BOX 3034  
DUBAI, UAE  
PHONE: 971-4-347-0460  
FAX: 971-4-347-0242

**USA - DAYTON**  
95 AIRPARK VISTA BLVD.  
DAYTON, NV 89403  
PHONE: 775-246-0760  
FAX: 775-246-0763

**USA - GREEN BAY**  
614 ELIZABETH ST  
GREEN BAY, WI 54302  
PHONE: 920-437-6561  
FAX: 920-437-8546

**USA - LAKE CHARLES**  
900 OPELOUSAS STREET  
LAKE CHARLES, LA 70601  
PHONE: 337-433-0605  
FAX: 337-439-0380

**USA - LOUISA**  
321 DUKE ST.  
LOUISA VA 23093  
PHONE: 540-967-5119  
FAX: 540-967-5120

**VENEZUELA - VALENCIA**  
URBANIZACION INDUSTRIAL  
"EL TIGRE"  
AVENIDA PRINCIPAL  
GALPÓN "H"  
VALENCIA EDO. CARABOBO  
VENEZUELA  
PHONE: 58-245-4000400  
FAX: 58-245-5642011

**VIETNAM - TINH BINH DUONG**  
LO D, 4R-CN,  
KHU CONG NGHIEP MY  
PHUOC 3  
THI XA BEN CAT  
TINH BINH DUONG  
VIETNAM

